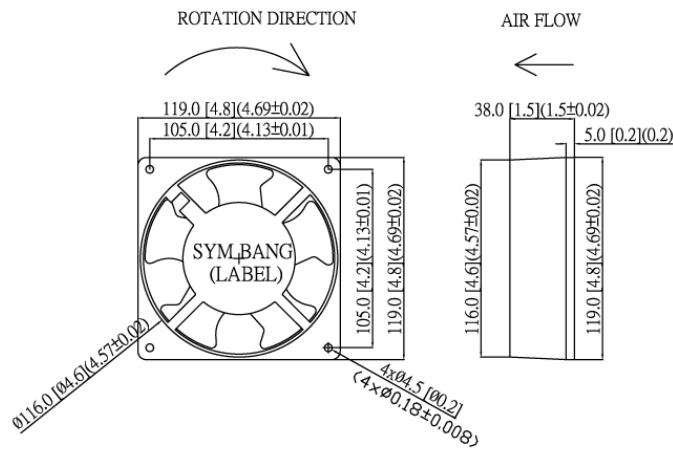



**A12038-C-C Series 119X119X38mm(4.7"X4.7"X1.5")**
[View WebPage](#)  
[View 3D Object](#)


<b>HOUSING</b>	Die-Cast Aluminum, Painted Black
<b>IMPELLER</b>	Thermoplastic PBT, UL94V-0
<b>BEARING</b>	Sleeve
<b>TERMINATION</b>	Terminals or Lead Wire
<b>OPERATING VOLTAGE RANGE</b>	85 VAC to 125 VAC for 120 V Type 185 VAC to 245 VAC for 230 V Type
<b>DIELECTRIC STRENGTH</b>	1,500 VAC for 1 minute
<b>INSULATION</b>	Class B
<b>INSULATION RESISTANCE</b>	100,000 Ohms min. @500 VDC
<b>OPERATING TEMPERATURE</b>	10 °C to +70 °C
<b>SAFETY</b>	Impedance Protected
<b>WEIGHT</b>	485g
<b>ROHS COMPLIANCE</b>	Yes

**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH <sub>2</sub> O	mmH <sub>2</sub> O	m <sup>3</sup> /min	CFM	
A12038V2MSL-C-C	230	50/60	0.1/0.1	23/23	2615/2660	0.29/0.35	7.3/9.0	2.3/2.72	80/96	

**DIMENSION**
**AIR PERFORMANCE**

 Mount Panel Cutout  
 Outlet Side & Inlet Side


UNIT:mm(inch)

