

A12738-S Series 127X127X38mm(5"X5"X1.5")

[View WebPage](#)






HOUSING	Die-Cast Aluminum, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
TERMINATION	Terminals or Lead Wire
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 120 V Type 185 VAC to 245 VAC for 230 V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 minute
INSULATION	Class A
INSULATION RESISTANCE	100,000 Ohms min. @500 VDC
OPERATING TEMPERATURE	-10°C To +70°C
SAFETY	Impedance Protected
WEIGHT	590g
ROHS COMPLIANCE	Yes

SPECIFICATION


MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH ₂ O	mmH ₂ O	m ³ /min	CFM	
A12738V1H-S	115	50/60	0.35/0.29	25.2/21.4	2700/3000	0.29/0.34	7.4/8.5	3.0/3.3	104/116	53
A12738V2H-S	230	50/60	0.20/0.16	27.8/22.6	2700/3000	0.29/0.34	7.4/8.5	3.0/3.3	104/116	53

DIMENSION

AIR PERFORMANCE

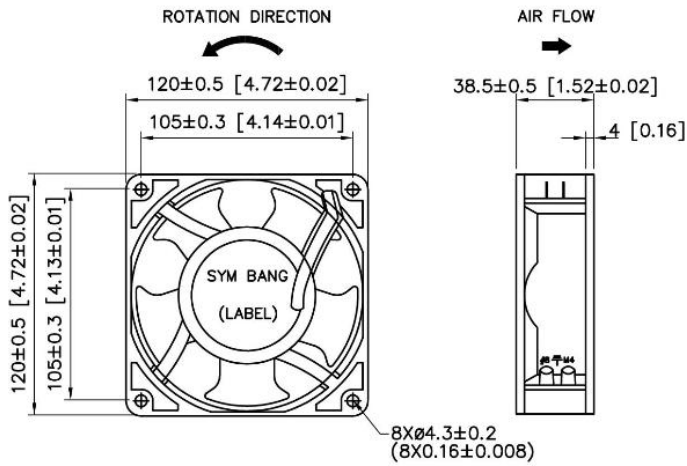

Mounting panel Cutout
 Outlet Side & Inlet Side

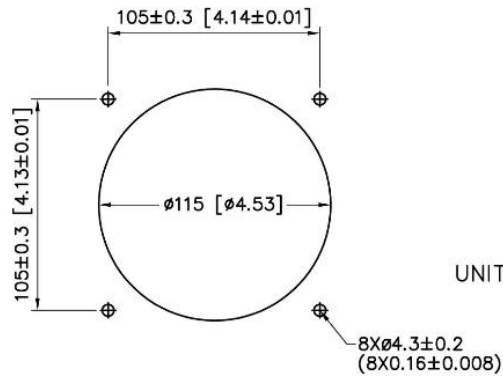

UNIT: mm[inch]