


## A15055-S Series 150X172X55mm(5.9"X6.77"X2.17")


[View WebPage](#)  
[View 3D Object](#)

	<b>HOUSING</b>	Die-Cast Aluminum, Painted Black
	<b>IMPELLER</b>	Injection Molded of Flame Retardant Polycarbonate, Black
	<b>BEARING</b>	Ball
	<b>TERMINATION</b>	Lead Wire
	<b>OPERATING VOLTAGE RANGE</b>	50VAC for 120VAC Type / 100VAC for 230VAC Type
	<b>DIELECTRIC STRENGTH</b>	1,500 VAC for 1 minute
	<b>INSULATION</b>	Class B
	<b>INSULATION RESISTANCE</b>	100,000 Ohms mins. @500 VDC
	<b>OPERATING TEMPERATURE</b>	-20 °C to+ 80 °C
	<b>SAFETY</b>	Impedance Protected
	<b>WEIGHT</b>	1kg
	<b>ROHS COMPLIANCE</b>	Yes



### SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH <sub>2</sub> O	mmH <sub>2</sub> O	m <sup>3</sup> /min	CFM	
A15055V1H-S	115	50/60	0.52/0.44	41/36	2600/2800	0.47/0.41	12.0/10.5	4.95/5.58	175/197	45/48
A15055V2H-S	230	50/60	0.26/0.21	42/34	2600/2800	0.47/0.41	12.0/10.5	4.95/5.58	175/197	45/48
A15055V24H-S	24	50/60	1.95/1.80	34/32	2530/2670	0.35/0.25	8.8/6.4	4.39/4.42	155/156	40/41


### DIMENSION

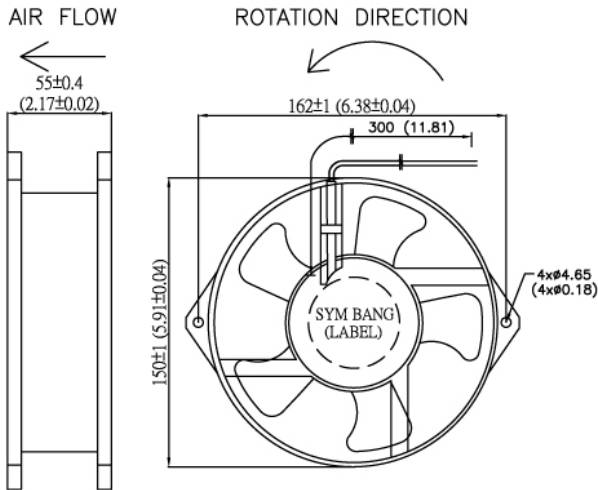

### AIR PERFORMANCE



### Mounton Panel Cutout Outlet Side & Inlet Side

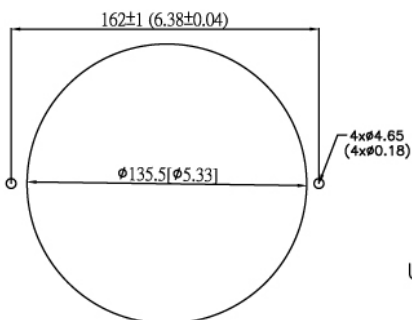

UNIT:mm(inch)