

A15055 Series 150X172X55mm(5.9"X6.77"X2.17")

[View WebPage](#)
[View 3D Object](#)






HOUSING	Die-Cast Aluminum, Painted Black
IMPELLER	Injection Molded of Flame Retardant Polycarbonate, Black
BEARING	Ball
TERMINATION	Lead Wire
OPERATING VOLTAGE RANGE	50VAC for 120VAC Type / 100VAC for 230VAC Type
DIELECTRIC STRENGTH	1,500 VAC for 1 minute
INSULATION	Class B
INSULATION RESISTANCE	100,000 Ohms mins. @500 VDC
OPERATING TEMPERATURE	-20 °C to+ 80 °C
SAFETY	Thermally Protected (Auto Restart)
WEIGHT	1kg
ROHS COMPLIANCE	Yes

SPECIFICATION


MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH ₂ O	mmH ₂ O	m ³ /min	CFM	
A15055V1H	115	50/60	0.34/0.38	38/44	2900/3300	0.58/0.74	14.7/18.8	5.80/6.70	204/235	57/61
A15055V2H	230	50/60	0.17/0.19	37/43	2900/3300	0.58/0.74	14.7/18.8	5.70/6.80	202/239	57/61

DIMENSION

AIR PERFORMANCE

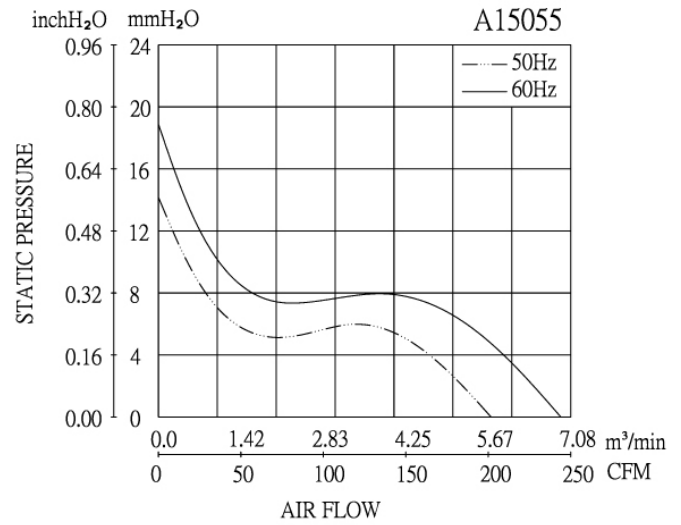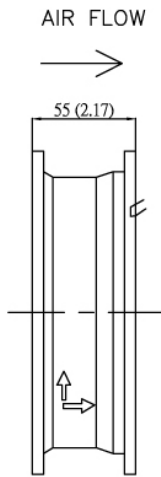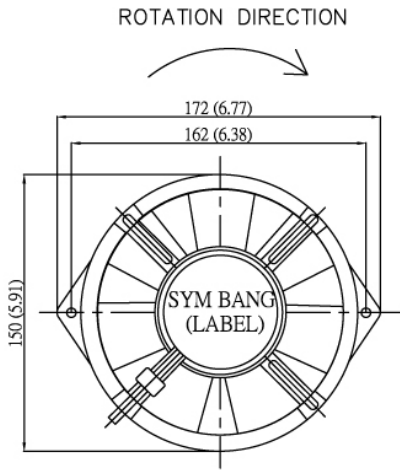

Mountion Panel Cutout
 Outlet Side & Inlet Side

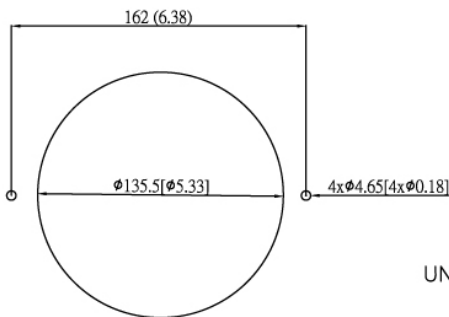

UNIT: mm(inch)