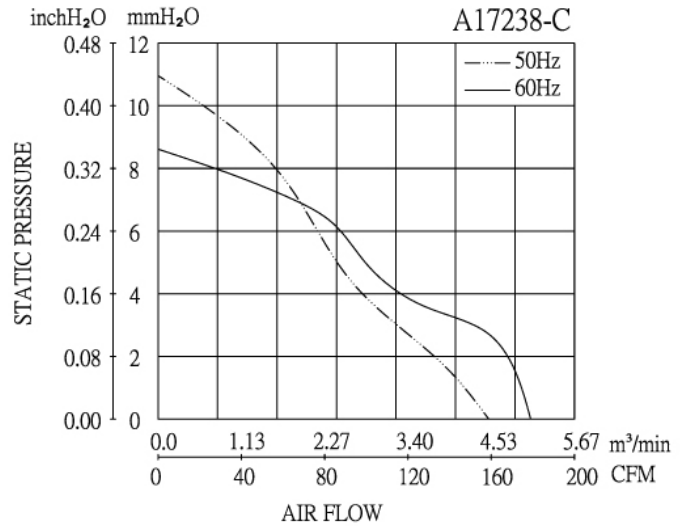
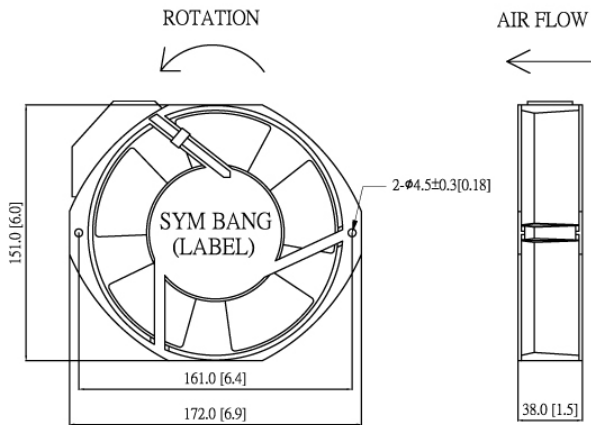
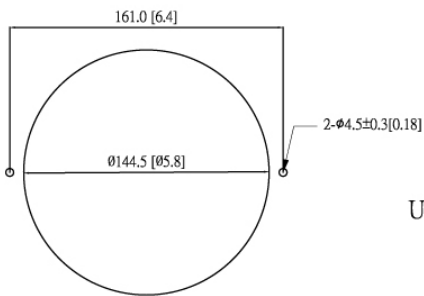


A17238-C Series 172X151X38mm(6.77"X6"X1.5")
[View WebPage](#)
[View 3D Object](#)


HOUSING	Die-Cast Aluminum, Painted Black or Natural Color
IMPELLER	Plastic With Fiber Glass Filled UL 94V-0
BEARING	Ball
TERMINATION	Terminals, Lead wire
OPERATING VOLTAGE RANGE	50VAC for 120VAC Type/ 100VAC for 230VAC Type
DIELECTRIC STRENGTH	1,500VAC for 1 Minute
INSULATION	Class B
INSULATION RESISTANCE	100,000 Ohms min. @ 500 VDC
OPERATING TEMPERATURE	-20 °C to+ 80 °C
SAFETY	Thermally Protected (Auto Restart)
WEIGHT	740g
ROHS COMPLIANCE	Yes

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH ₂ O	mmH ₂ O	m ³ /min	CFM	
A17238V1HB-C	110	50/60	0.40/0.40	30/28	2580/2880	0.45/0.35	11.4/8.9	4.57/5.29	160/185	49
A17238V2HB-C	220	50/60	0.28/0.23	38/35	2580/2880	0.45/0.35	11.4/8.9	4.57/5.29	160/185	49

DIMENSION
AIR PERFORMANCE

 Mounting Panel Cutout
 Outlet Side & Inlet Side


UNIT :mm(inch)