

## A17238 Series 172X151X38mm(6.77"X6"X1.5")

[View WebPage](#)  
[View 3D Object](#)






<b>HOUSING</b>	Die-Cast Aluminum, Painted Black
<b>IMPELLER</b>	Thermoplastic PBT, UL94V-0
<b>BEARING</b>	Ball
<b>TERMINATION</b>	Terminals, Lead wire
<b>OPERATING VOLTAGE RANGE</b>	50VAC for 120VAC Type/ 100VAC for 230VAC Type
<b>DIELECTRIC STRENGTH</b>	1,500VAC for 1 Minute
<b>INSULATION</b>	Class B or F
<b>INSULATION RESISTANCE</b>	100,000 Ohms min. @ 500 VDC
<b>OPERATING TEMPERATURE</b>	-20 °C to + 80 °C
<b>SAFETY</b>	Thermally Protected (Auto Restart)
<b>WEIGHT</b>	693g
<b>ROHS COMPLIANCE</b>	Yes

### SPECIFICATION


MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH <sub>2</sub> O	mmH <sub>2</sub> O	m <sup>3</sup> /min	CFM	
A17238V1H	115	50/60	0.22/0.29	25/32	2800/3500	0.65/0.48	16.5/12.2	5.6/6.4	198/225	58/62
A17238V1L	115	50/60	0.15/0.15	16/16	1400/1800	0.18/0.25	4.57/6.35	2.8/3.4	110/119	40/45
A17238V2H	230	50/60	0.11/0.14	25/31	2800/3500	0.65/0.48	16.5/12.2	5.6/6.5	198/229	58/62
A17238V2L	230	50/60	0.06/0.07	14/13	1400/1800	0.18/0.25	4.57/6.35	2.8/3.3	99/117	40/45

### DIMENSION

### AIR PERFORMANCE

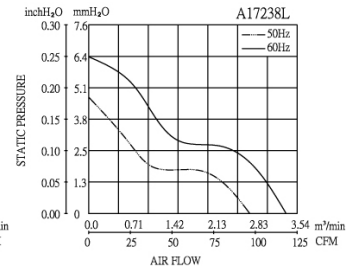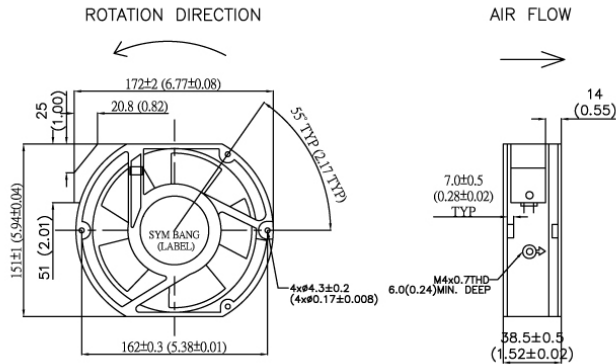

### Mountion Panel Cutout Outlet Side & Inlet Side

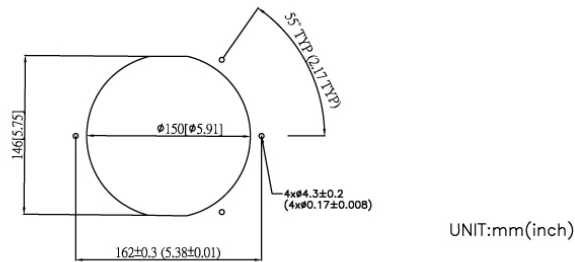

UNIT:mm(inch)