ACTIVA / SYMBANG
9F-1, 472, Chung San 2nd Road, Kaohsiung 800,Taiwan, R.O.C.
TEL:886-7-2824356 FAX:886-7-2414287
Website:www.activa.com.tw Email:symbang@seed.net.tw

A17251-S Series 172X151X51mm(6.77"X6"X2")

View WebPage
View 3D Object

HOUSING	Die-Cast Aluminum, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
TERMINATION	2 Lead Wires or Terminal for AC power supply, 3 Lead Wires for Signal-Rotation
OPERATING VOLTAGE RANGE	90 VAC to 120 VAC for 110V Type
DIELECTRIC STRENGTH	1,500VAC for 1 Minute
INSULATION	100,000 Ohms min.@500 VDC
INSULATION RESISTANCE	Class A
OPERATING TEMPERATURE	-10°C To +70°C
SAFETY	Thermally Protected(Auto Restart)
WEIGHT	1050g
ROHS COMPLIANCE	YES
ADDITIONAL FUNCTION	RD H SPEED ,60Hz ONLY

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH₂O	mmH₂O	m³/min	CFM	
A17251V1S-S	115	50/60	0.41/0.38	41.9/42.1	2780/3230	0.63/0.79	16/20	7.1/8.2	250/290	56
A17251V1H-S	115	50/60	0.23/0.25	26.7/29.7	2800/3200	0.63/0.79	16/20	5.4/6.6	190/235	50
A17251V1M-S	115	50/60	0.15/0.19	16.1/21.0	2550/2400	0.51/0.55	13/14	4.7/4.8	165/170	40
A17251V1L-S	115	50/60	0.18/0.15	19.8/18.2	1450/1750	0.40/0.31	10/8	3.1/3.0	110/106	32
A17251V2H-S	230	50/60	0.11/0.13	26.7/31.2	2800/3200	0.63/0.79	16/20	5.4/6.6	190/235	50
A17251V2M-S	230	50/60	0.09/0.11	17.9/22.8	2550/2300	0.51/0.55	13/14	4.7/4.8	165/170	40
A17251V2L-S	230	50/60	0.08/0.07	17.9/17.1	1450/1750	0.40/0.31	10/8	3.1/3.0	110/106	32

DIMENSION

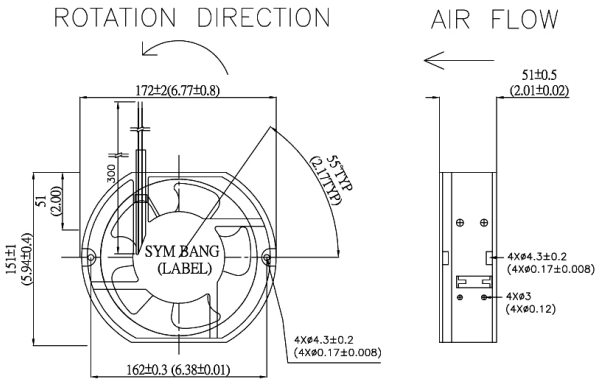
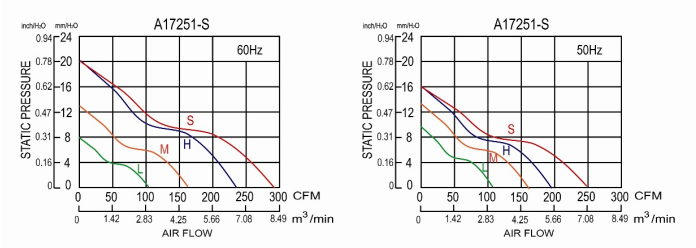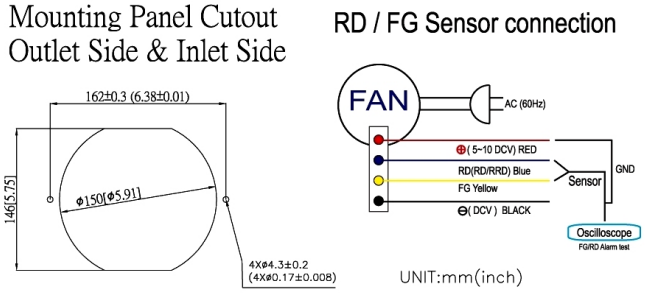
AIR PERFORMANCE