


## A17251DV Series 172X151X51mm(6.77"X5.94"X2") DUAL VOLTAGE

[View WebPage](#)  
[View 3D Object](#)




	<b>HOUSING</b>	Die-Cast Aluminum, Painted Black
	<b>IMPELLER</b>	Thermoplastic PBT, UL94V-0
	<b>BEARING</b>	Ball
	<b>TERMINATION</b>	Lead Wire
	<b>OPERATING VOLTAGE RANGE</b>	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230 V Type
	<b>DIELECTRIC STRENGTH</b>	1,500 VAC for 1 minute
	<b>INSULATION</b>	Class B
	<b>INSULATION RESISTANCE</b>	100,000 Ohms min. @ 500VDC
	<b>OPERATING TEMPERATURE</b>	-20 °C TO + 80 °C
	<b>SAFETY</b>	Impedance Protected
<b>WEIGHT</b>	1.0kg	
<b>ROHS COMPLIANCE</b>	Yes	

### SPECIFICATION


MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH <sub>2</sub> O	mmH <sub>2</sub> O	m <sup>3</sup> /min	CFM	
A17251DVHBL	115(230)	50/60	0.43/0.40(0.22/0.20)	35/32	2800/3100	0.56/0.71	14.2/18.0	5.4/6.3	190/238	50/55

### DIMENSION

### AIR PERFORMANCE

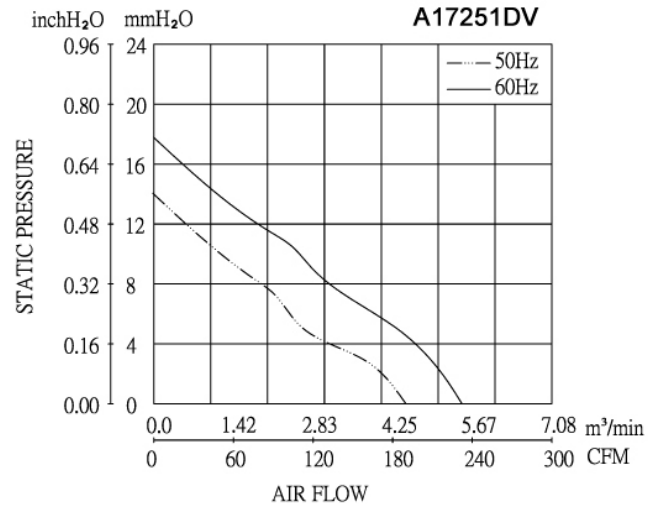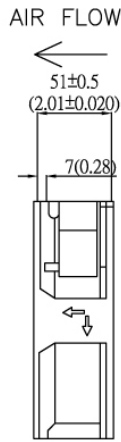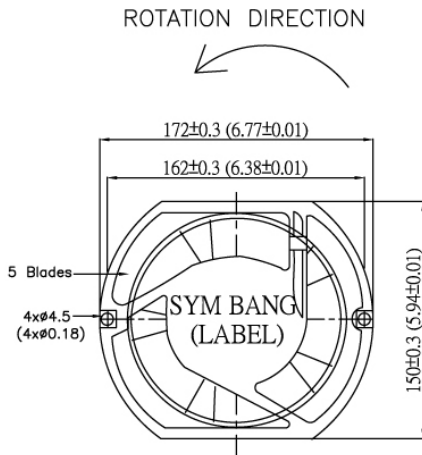

### Mountion Panel Cutout Outlet Side & Inlet Side

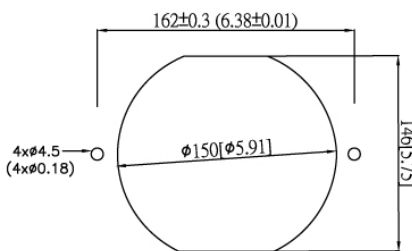

UNIT:mm(inch)