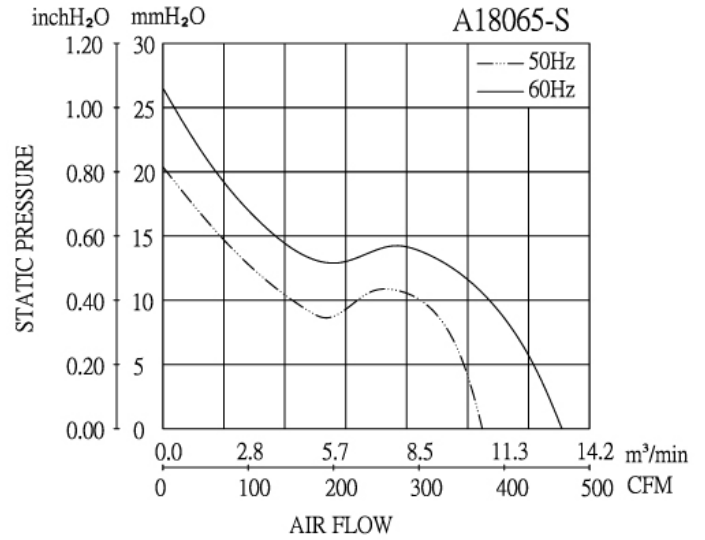
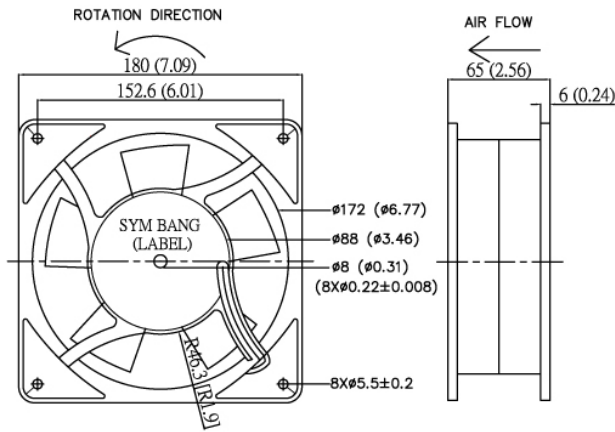
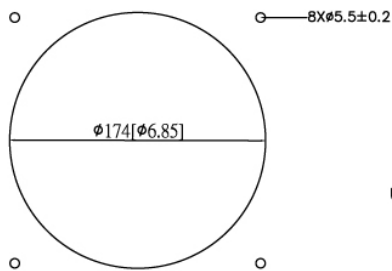


A18065-S Series 180X180X65mm(7.09"X7.09"X2.56")
[View WebPage](#)
[View 3D Object](#)


HOUSING	Die - Cast Aluminum, Painted Black
IMPELLER	Injection Molded of Flame Retardant Polycarbonate, Black
BEARING	Ball
TERMINATION	Terminals or Lead Wire
OPERATING VOLTAGE RANGE	60VAC to 130VAC for 120VAC Type 120VAC to 240VAC for 230VAC Type
DIELECTRIC STRENGTH	1,500 VAC for 1 minute
INSULATION	Class B
INSULATION RESISTANCE	100,000 Ohms min. @ 500VDC
OPERATING TEMPERATURE	-20 °C TO + 80 °C
SAFETY	Thermally Protected (Auto Restart)
WEIGHT	1.8Kg
ROHS COMPLIANCE	Yes

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH ₂ O	mmH ₂ O	m ³ /min	CFM	
A18065V1H-S	115	50/60	0.50/0.45	44/48	2770/3200	0.81/1.06	20.5/26.8	14/18	323/355	60/62
A18065V2H-S	230	50/60	0.20/0.23	40/51	2780/3170	0.81/1.06	20.5/26.8	14/17	321/353	60/62

DIMENSION
AIR PERFORMANCE

**Mountion Panel Cutout
Outlet Side & Inlet Side**


UNIT:mm(inch)