

A22060 Series Ø220X60mm(Ø8.60"X2.36")

[View WebPage](#)
[View 3D Object](#)





HOUSING	Die - Cast Aluminum, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
TERMINATION	Lead Wire
DIELECTRIC STRENGTH	1,500 VAC for 1 minute
INSULATION	Class B
INSULATION RESISTANCE	100,000 Ohms min. @ 500VDC
OPERATING TEMPERATURE	-20 °C TO + 80 °C
SAFETY	Impedance Protected
WEIGHT	1.4kg
ROHS COMPLIANCE	Yes

SPECIFICATION


MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH ₂ O	mmH ₂ O	m ³ /min	CFM	
A22060V1H	115	50	0.7	47	2400	0.28	7.05	10.2	360	56
A22060V2H	230	50	0.32	42	2400	0.28	7.05	10.2	360	56

DIMENSION

AIR PERFORMANCE

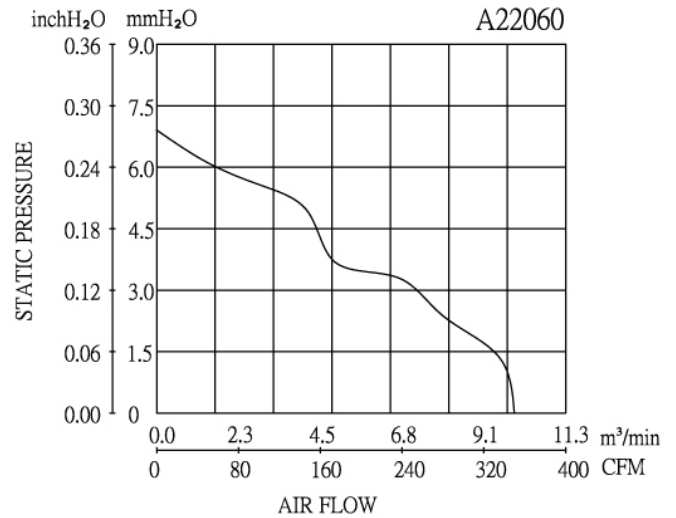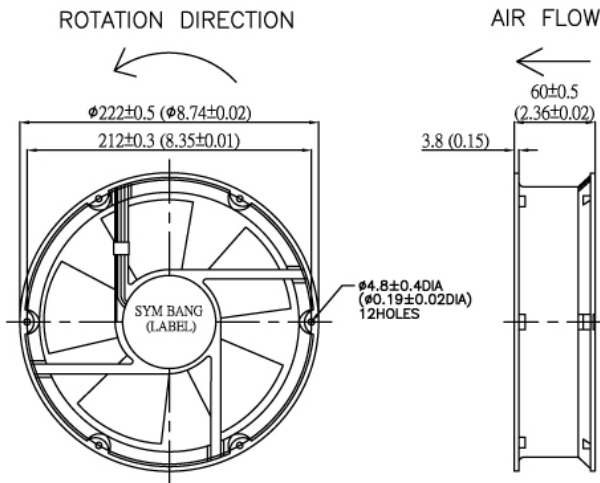

Mountion Panel Cutout Outlet Side & Inlet Side

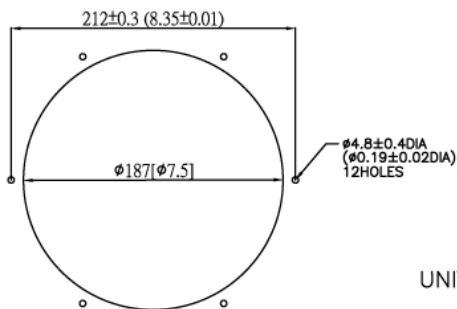

UNIT:mm(inch)