ACTIVA / SYMBANG
9F-1, 472, Chung San 2nd Road, Kaohsiung 800,Taiwan, R.O.C.
TEL:886-7-2824356 FAX:886-7-2414287
Website:www.activa.com.tw Email:symbang@seed.net.tw

A9225 Series 92X92X25mm(3.62"X3.62"X1")

View WebPage
View 3D Object

HOUSING	Die-Cast Aluminum, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
TERMINATION	Terminals or Lead Wire
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115 V Type 185 VAC to 245 VAC for 230 V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 minute
INSULATION	Class B
INSULATION RESISTANCE	100,000 Ohms min. @ 500 VDC
OPERATING TEMPERATURE	-10 °C to + 70 °C for Sleeve Type -20 °C to + 80 °C for Ball Type
SAFETY	Impedance Protected
WEIGHT	300g
ROHS COMPLIANCE	Yes

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH₂O	mmH₂O	m³/min	CFM	
A9225V1H	115	50/60	0.14/0.11	11/9	2700/3100	0.18/0.26	4.57/6.60	0.85/1.0	30/36	40/45
A9225V2H	230	50/60	0.07/0.06	12/10	2700/3100	0.18/0.26	4.57/6.60	0.85/1.0	30/36	40/45

DIMENSION

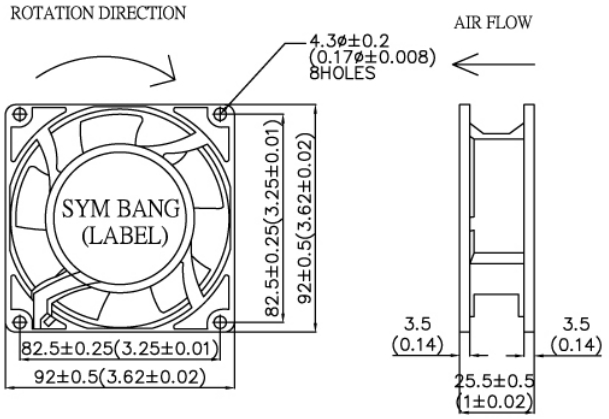

Mountion Panel Cutout
Outlet Side & Inlet Side

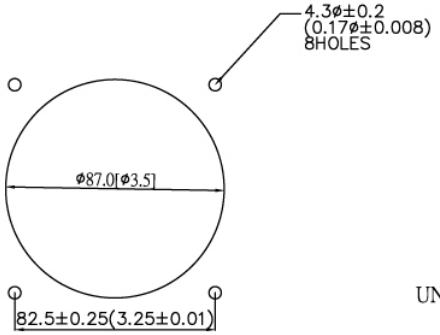

UNIT:mm(inch)
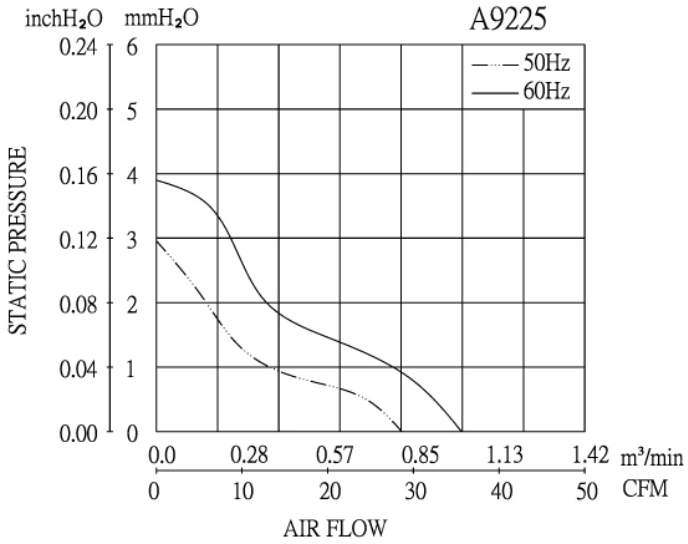
AIR PERFORMANCE