ACTIVA / SYMBANG
9F-1, 472, Chung San 2nd Road, Kaohsiung 800,Taiwan, R.O.C.
TEL:886-7-2824356 FAX:886-7-2414287
Website:www.activa.com.tw Email:symbang@seed.net.tw

A9238-S Series 92X92X38mm(3.62"X3.62"X1.5")

View WebPage

HOUSING	Die-Cast Aluminum, Painted Black
IMPELLER	Injection Molded of Flame Retardant Petardant Polycarbonate, Black
BEARING	Ball or Sleeve
TERMINATION	Terminals or Lead Wire
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 120 V Type 185 VAC to 245 VAC for 230 V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 minute
INSULATION	Class A
INSULATION RESISTANCE	100,000 Ohms min. @ 500 VDC
OPERATING TEMPERATURE	-10°C To + 70°C
SAFETY	Impedance Protected
WEIGHT	450g
ROHS COMPLIANCE	Yes

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						$InchH_2O$	mmH_2O	m^3/min	CFM	
A9238V1H-S	115	50/60	0.15/0.13	12.8/11.3	2700/3200	0.18/0.22	4.5/5.5	1.19/1.42	42/50	32
A9238V1M-S	115	50/60	0.07/0.06	5.8/5.6	2400/2550	0.14/0.17	3.5/4.2	0.79/0.91	28/32	23
A9238V1L-S	230	50/60	0.05/0.05	4.4/4.3	2200/1950	0.12/0.10	3.0/2.5	0.71/0.59	25/21	19
A9238V2H-S	230	50/60	0.07/0.06	12.7/11.1	2600/3050	0.18/0.22	4.5/5.5	1.19/1.42	42/50	32
A9238V2M-S	230	50/60	0.04/0.04	6.8/6.4	2400/2550	0.14/0.17	3.5/4.2	0.79/0.91	28/32	23

DIMENSION

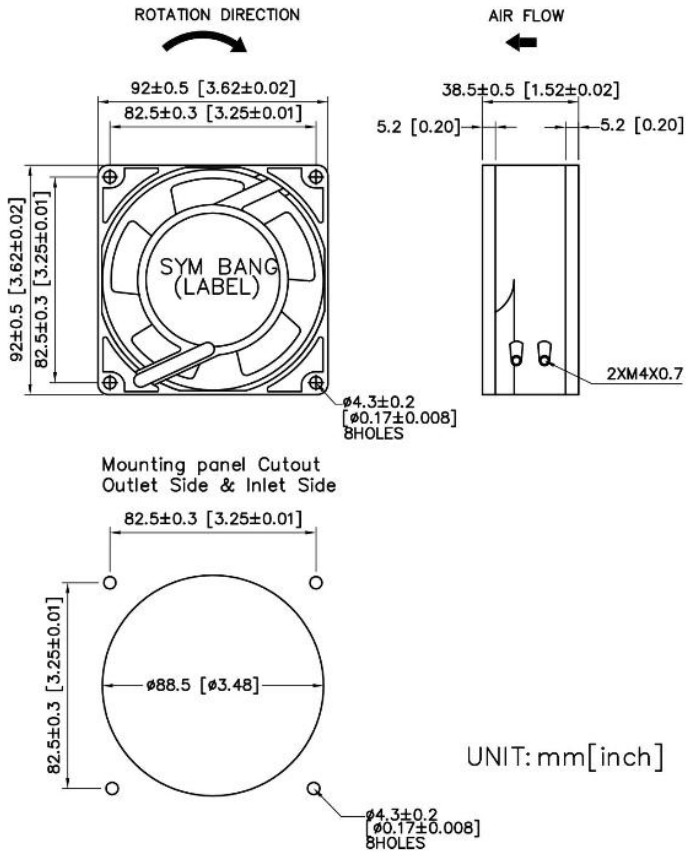
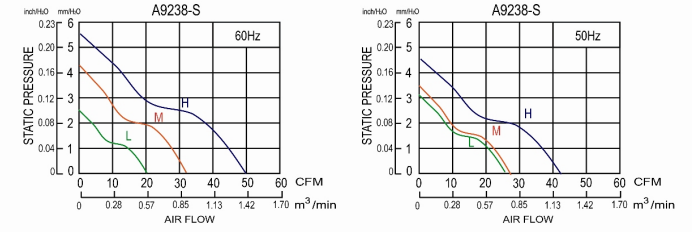
AIR PERFORMANCE