


AB411146 Series 411x146x86mm(16.2"x5.75"x3.39")

[View WebPage](#)

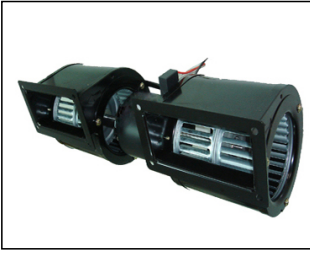


HOUSING	STEEL
IMPELLER	Aluminum
BEARING	TPI or NMB
TERMINATION	GEM TERMINAL IND CO LTD E:132262(S)
OPERATING VOLTAGE RANGE	AC 230V/50HZ ±3 %
DIELECTRIC STRENGTH	AC 1500V 1min 3mA
INSULATION RESISTANCE	DC 500V >100M?
OPERATING TEMPERATURE	-10 °C ~55 °C
WEIGHT	3.2kg
ROHS COMPLIANCE	YES

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE		AIR FLOW		NOISE dB(A) @1M
						InchH ₂ O	mmH ₂ O	m ³ /min	CFM	
AB411146V1H BL	110	60	0.44	25	1655	0.33	8.3	6.86	240	
AB411146V2H BL	220	60	0.22	25	1655	0.33	8.3	6.86	240	

DIMENSION

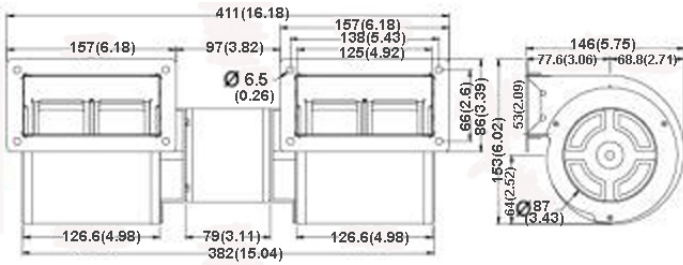

Unit:mm(inch)

AIR PERFORMANCE

