


D12025F-K Series

[View WebPage](#)

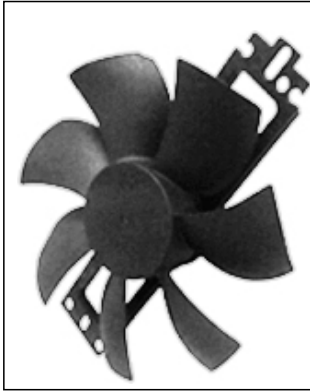


IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve Bearing
OPERATING TEMPERATURE	-10°C To +60°C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	83g
ROHS COMPLIANCE	YES
ADDITIONAL FUNCTION	FG


SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D12025V24MSF-K-FG	24	0.21	5.04	2200	0.18	4.60	80.6	2.28	27

DIMENSION

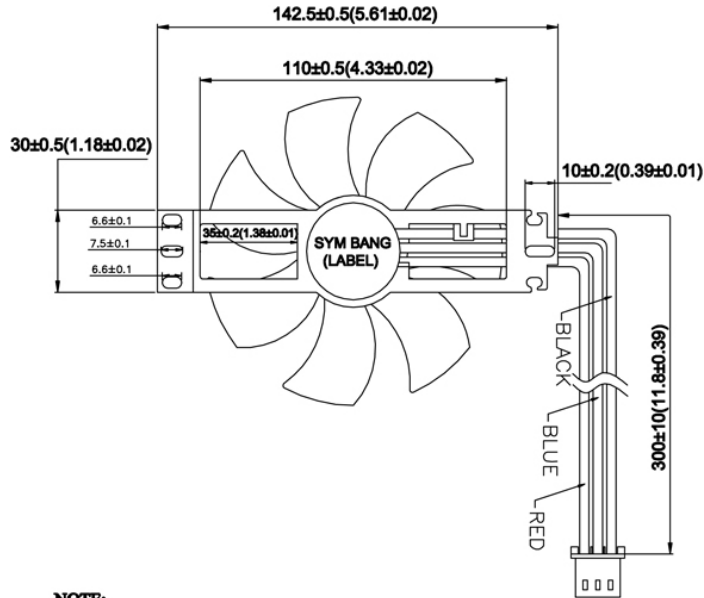

AIR PERFORMANCE



NOTE:

LEAD WIRES: WIRES UL 1007,#26 AWG

BLACK WIRE (-)

RED WIRE (+)

BLUE WIRE (FG)

UNIT:mm(inch)