

**D4010-K Series 40X40X10mm(1.57"X1.57"X0.39")**

[View WebPage](#)  
[View 3D Object](#)




<b>HOUSING</b>	Thermoplastic PBT of UL94V-0
<b>IMPELLER</b>	Thermoplastic PBT of UL94V-0
<b>BEARING</b>	Two Ball Bearing
<b>OPERATING TEMPERATURE</b>	-10°C To +60°C
<b>INSULATION RESISTANCE</b>	10MEGA Ohm Min.At 500 VDC (Between Frame and (+)Terminal)
<b>DIELECTRIC STRENGTH</b>	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and (+)Terminal)
<b>WEIGHT</b>	15g
<b>ROHS COMPLIANCE</b>	yes
<b>ADDITIONAL FUNCTION</b>	RD


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D4010V3.3HB-K-RD	3.3	0.28	0.924	6500	0.17	4.29	7.35	0.21	31

**DIMENSION**

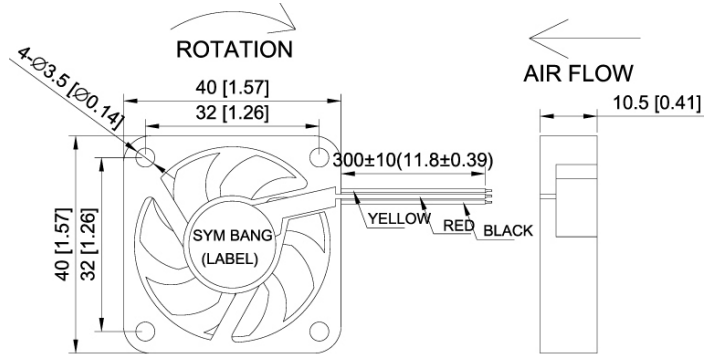


**AIR PERFORMANCE**




Unit:mm(inch)

Mounting Panel Cutout  
Outlet Side & Inlet Side



RD Wiring Diagram



UNIT:mm(inch)