


D4020 Series 40X40X20mm(1.57"X1.57"X0.79")

[View WebPage](#)
[View 3D Object](#)




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min.@500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	40g
ROHS COMPLIANCE	Yes

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D4020V5H	5	0.25	1.25	7000	0.15	3.80	7.77	0.22	31
D4020V5M	5	0.12	0.60	6000	0.08	2.00	5.00	0.14	26
D4020V12H	12	0.16	1.92	7000	0.21	5.31	8.53	0.24	31
D4020V12M	12	0.10	1.20	6000	0.15	3.91	7.09	0.20	26
D4020V12L	12	0.08	0.96	5000	0.11	2.80	6.00	0.17	22
D4020V24H	24	0.18	4.32	7000	0.21	5.31	8.53	0.24	31
D4020V24M	24	0.13	3.12	6000	0.15	3.91	7.09	0.20	26
D4020V24L	24	0.10	2.40	5000	0.11	2.80	6.00	0.17	22

DIMENSION

AIR PERFORMANCE

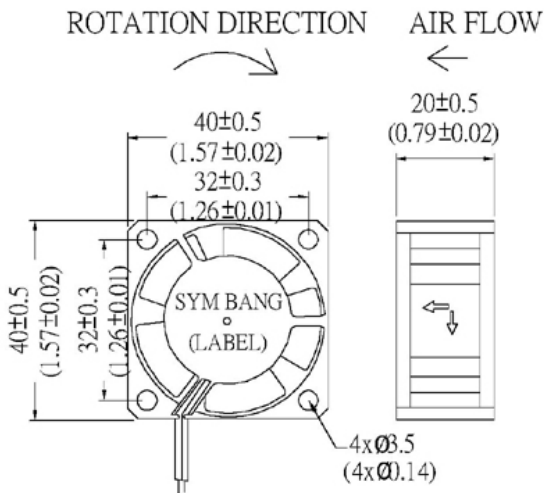

Mountion Panel Cutout
 Outlet Side & Inlet Side

